

INTRODUCING THE **50MM MDR ROLLER CONVEYOR**

Speed
9.8-157 m/min

Payload
5 - 60 Kg

Low
Noise

Powder
Coated

Power Your Conveyor with
Compact Performance!

SPECS →

✉ sales@rollndrive.com


ROLLER CONVEYOR SPECS

 Voltage : 48VDC

 Power : 40W / 60W

 Torque : 0.6 - 9.6 Nm

 Speed : 9.8 - 157 m/min

 RPM : 62 - 1000 RPM

 Payload : 5 - 60 Kg

50mm MDR

MDR Input

ROLLER CONVEYOR DETAILS

Material

-SS304

-MS

Types



Poly V



Sprocket



O Groove

Applications



Logistics



Pharma



Food



X-Ray
Scanning

WHAT'S NEXT FOR YOUR CONVEYOR LINE?



RollnDrive

PowerInside

Your Conveyor
Problem Solver

✉ sales@rollndrive.com


☎ +91 96378 99174

CONTACT US →

INTRODUCING THE


CROWNED MDR BELT CONVEYOR

Smarter. Reliable. Efficient.

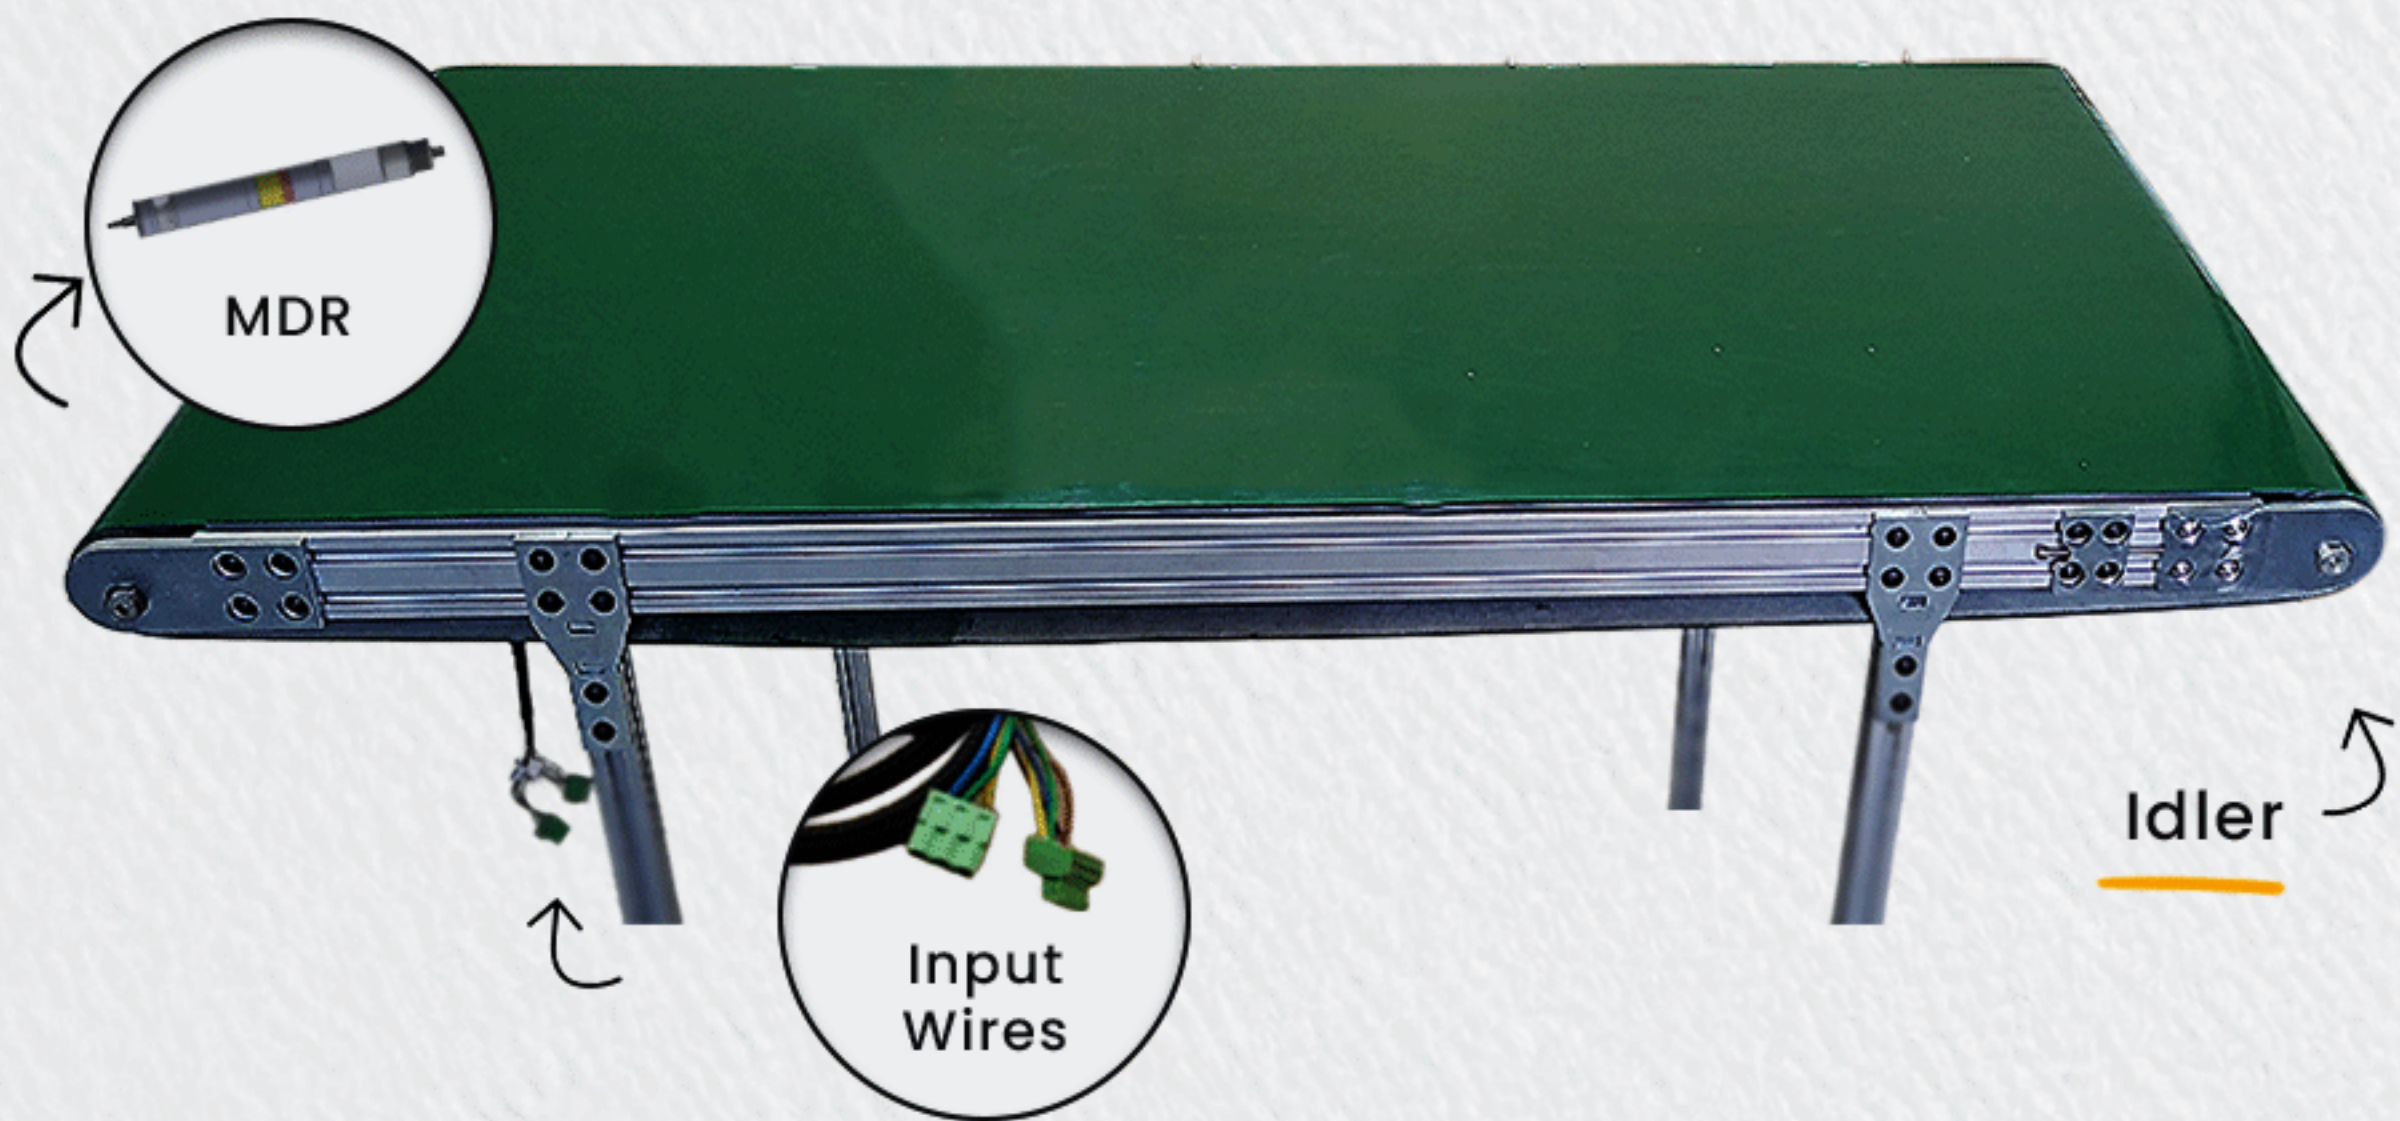

EXPLORE MDR SPECS ➔

BELT CONVEYOR SPECS

 Voltage	48 VDC
 Power	40W / 60W
 Speed	9.8 to 157 m/min
 RPM	62 – 1000 RPM
 Torque	0.6 – 9.6 Nm
 Payload	5 – 60 Kgs

Features

- ★ Modular Design
- ★ Fits Checkweighers, DWS, Packaging
- ★ Smooth tracking with Crowned MDR

BELT CONVEYOR ROLLER DETAILS

Material


SS304

MS


Belt Options



PVC

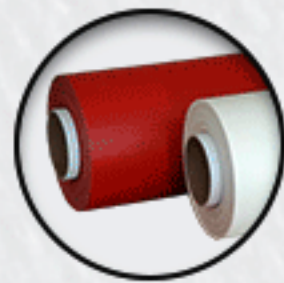

Silicone

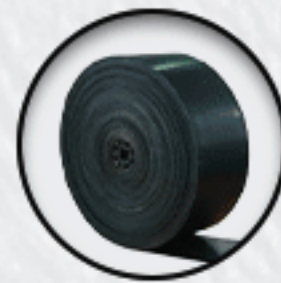

Rubber

Applications



Logistics



Pharma



Food



X-Ray
Scanning

WHAT'S NEXT FOR YOUR CONVEYOR LINE?



Your Conveyor Problem Solver

✉ sales@rollndrive.com

☎ +91 96378 99174